



B-VENT Product Update

NOVEMBER 2002

Metal-Fab B-Vent connects easily to other brands. You don't need anything else!

Mating two different brands of B-Vent doesn't have to cost you time and money - Metal-Fab B-Vent connects to competitive brands in only TWO EASY STEPS!

INSTALLING REPLACEMENT EQUIPMENT

(Into competitive female end, 3"-6"):

STEP 1: Insert Metal-Fab male end into competitive female end (inlet).
NO ADAPTER REQUIRED!

STEP 2: Secure with three sheet metal screws. (See instructions in figure 1.)

DEPLETING COMPETITIVE STOCK

(Connecting into competitive male end):

STEP 1: Insert male end (outlet) of competitive gas vent into female end of Metal-Fab B-Vent adapter (M6A, M12A, M18A).

STEP 2: Tighten adapter clamp tight around the gas vent. (See instructions in figure 2.)

FIGURE 1



LISTED MH7860

AFTER INSTALLATION SECURE WITH (3) 1/4" LONG (MAX.) SHEET METAL SCREWS AT APPROX. 120°. DO NOT PENETRATE FLUE CASING.

FEMALE END OF GAS VENT OTHER THAN METAL-FAB (SEE REVERSE)

INSERT 3/4" TO 1 1/2"

STANDARD METAL-FAB B-VENT



FIGURE 2




FEMALE END OF METAL-FAB ADAPTER

TIGHTEN CLAMP TO SECURE

INSERT 3/4" TO 1 1/2", UNTIL FULLY SEATED

MALE END OF GAS VENT OTHER THAN METAL-FAB (SEE REVERSE)

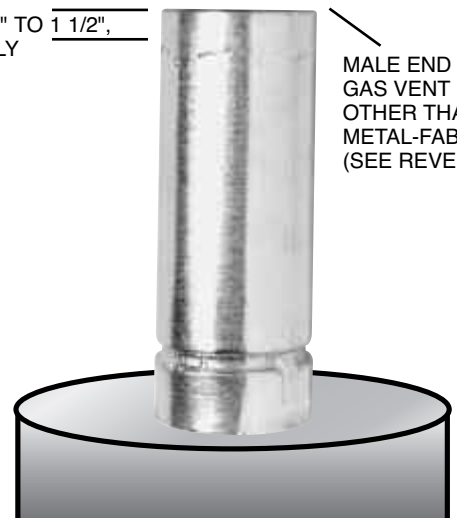

Metal-Fab round B-Vent has been evaluated and listed by Underwriter's Laboratories, Inc. to mate with other specifically identified and UL Listed round gas vent, in 3" through 6" diameters. Metal-Fab's approval covers connections to the following B-Vent products:

General Products Co., Inc.	(Airjet)
American Metal Products Co.	(Amerivent)
Hart & Cooley	(Metlvent)
Metalbestos & Airmate	(Household Manufacturing)
Mitchell Metal Products Inc.	(Mitchvent)
Simpson Dura-Vent Inc.	(Duravent)
ECCO Heating Products	(ECCO Manufacturing)



P.O. BOX 1138 • WICHITA, KANSAS 67201
(316) 943-2351 • FAX (316) 943-2717

e-mail: info@metal-fabinc.com • www.metal-fabinc.com