




MODEL: MDFD DYNAMIC CURTAIN-TYPE FIRE DAMPER 1.5-HOUR RATING

CLASSIFIED
 **UL CLASSIFIED**
 (SEE COMPLETE MARKING ON PRODUCT)



1.5-HOUR RATING

For use in fire barriers rated for 2 hours or less.



Standard Construction:

- Frame:** Roll Formed 22 Ga. Galvanized Steel with Safety Edge. Width and height dimensions available in 1/4" increments.
- Blades:** Roll Formed 24 Ga. Galvanized Steel, Curtain Type.
- Springs:** Stainless Steel.
- Transition:** 20 Ga. Galvanized Steel.
- Finish:** Mill Galvanized Standard.

Options:

- Type-A, Type-B and Type-C
- Fusible link 165°F, 212°F, 286°F
- Vertical or Horizontal application.
- Sleeve options are 20Ga., 18Ga., or 16Ga. and 12", 14" or 16" long
- Low pressure, medium/high pressure or high pressure
- Microswitch

TYPICAL VERTICAL DAMPER

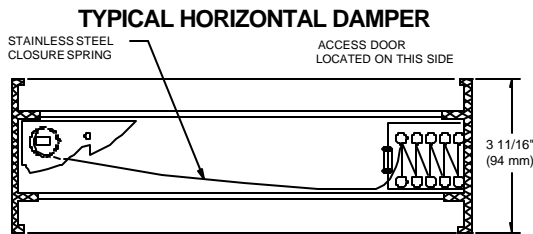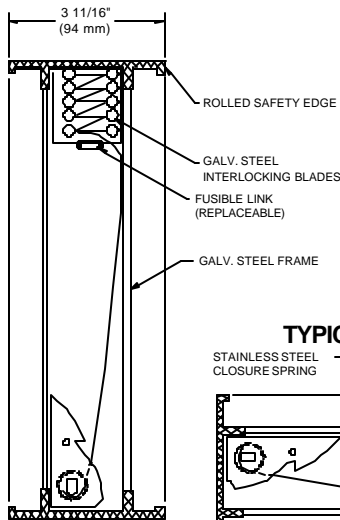


Duct Size Limitations:

	<u>MIN.</u>	<u>MAX. SINGLE SECTION</u>	<u>MAX. MULTI SECTION</u>
Vertical A	6.00"W x 5.50"H	36.25"W x 36.25"H	N/A
Vertical B	6.00"W x 3.75"H	36.25"W x 33.25"H	N/A
Vertical C	5.25" DIA.	35.25"W x 32.25"H	N/A
Horizontal A	6.00"W x 3.50"H	18.25"W x 18.25"H	36.25"W x 36.25"H
Horizontal B	6.00"W x 3.75"H	18.25"W x 16.25"H	36.25"W x 32.25"H
Horizontal C	5.25" DIA.	17.25"W x 15.25"H	N/A

Project:	Contractor:
Location:	Address:
Architect:	P.O. Number:
Engineer:	Date:

MODEL STYLES

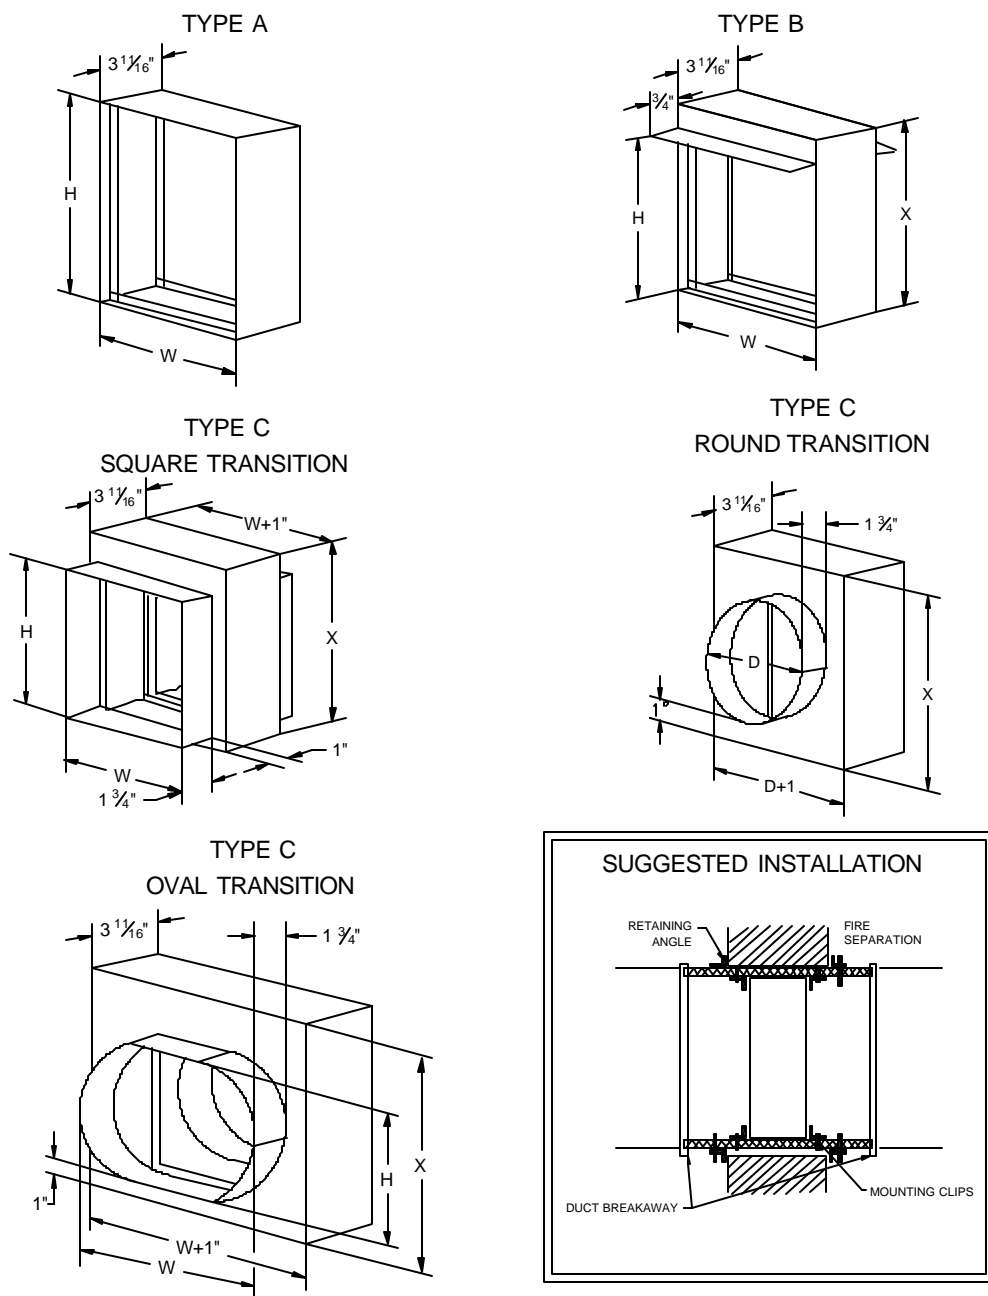

W = WIDTH (DUCT)

H = HEIGHT (DUCT)

D = DIAMETER

X = VARIABLE (SEE SIZE CHART)

SUGGESTED SPECIFICATION

All fire dampers shall be of the dynamic closure type as manufactured by Metal-Fab Inc. They shall have been successfully tested to U.L. Standard 555 -6th Edition as to their ability to close under dynamic airflow conditions and they shall bear the U.L. label stating that they are suitable for that application (ordinary static fire dampers are not acceptable). Dynamic closure fire dampers shall have been successfully tested in vertical mounting positions and to maximum static pressures of 4" w.g. Dynamic closure fire dampers shall be installed in accordance with the manufacturer's instructions. All fire dampers shall meet the requirements of NFPA-90A.

