



Collar Ring for T-Bar Diffusers
 For use with MFLCBD Dampers or Diffusers w/ Adaptable Plenums
 Galvanized Steel Construction
 Available in 6", 8", 10", 12" and 14" Sizes

MFLCCR DIMENSIONAL CHART		
DIA.	"A"	"B"
6"	14"	12-9/16"
8"	14"	12-9/16"
10"	14"	12-9/16"
12"	14"	12-9/16"
14"	16"	15-9/16"

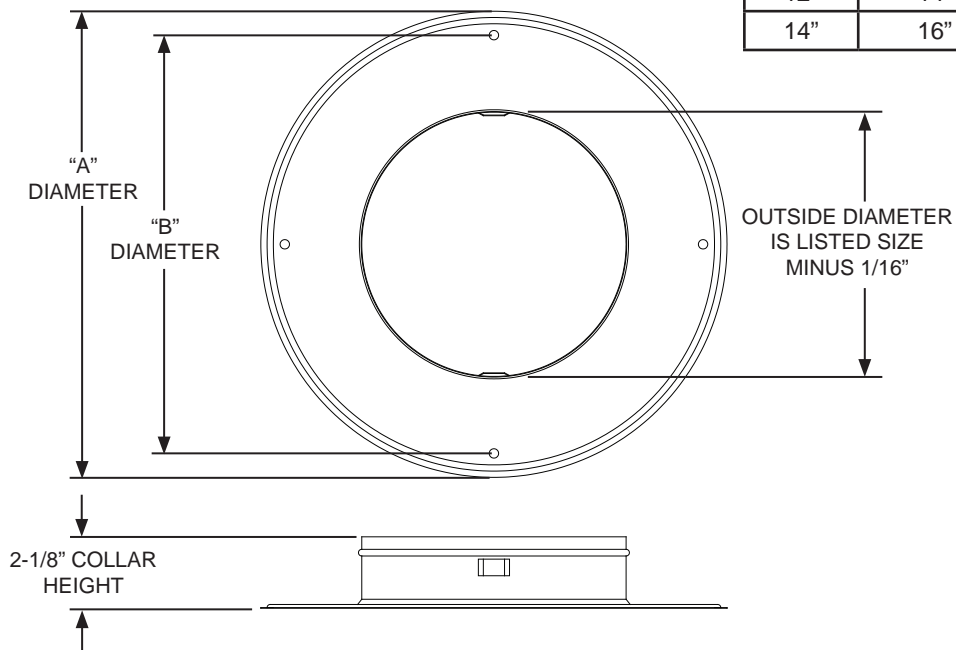

MFLCCR Installation Instructions

Steel Plenums - MFLCCR collar is supplied with four (4) short plastic fasteners for attaching collar to the adaptable steel plenum. Align the four fasteners with the mounting holes on the back of the steel plenum and push firmly into place (See **FIG. 1**).

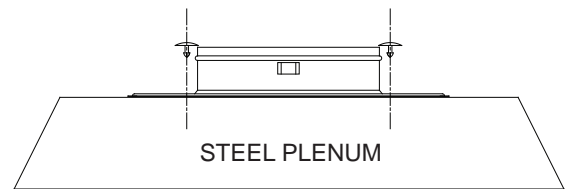

Fiberglass Plenums - Cut required collar size opening in the fiberglass plenum. Remove the four (4) short plastic fasteners from the collar, then position collar over opening on the fiberglass plenum. Mark four (4) holes by inserting a small screwdriver or awl through the collar holes and through the plenum. Attach collar by inserting four (4) MFPP fasteners (**Sold Separately**) through plenum underside and into collar holes (See **FIG. 2**).

