




MFLCISDP LIGHT COMMERCIAL INDUSTRIAL SUPPLY DIFFUSER PERFORATED

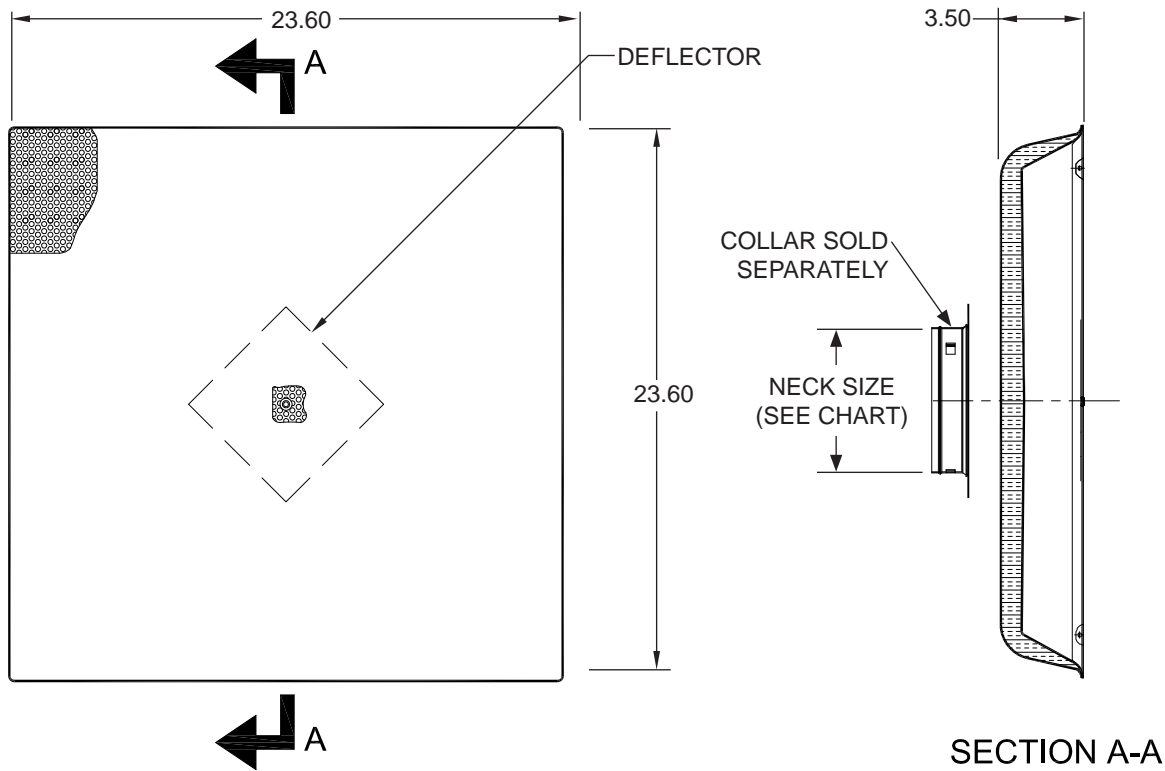

- Fits in standard 24"x 24" T-bar lay-in ceiling systems
- Perforated steel face construction with deflector
- Molded fiberglass back panel
- Diffuser requires a collar ring (sold separately); Metal-Fab collar ring model MFLCCR Series, or tab-lock, and spin-in type collars are acceptable
- Face Finish: White

MFLCISDP (Perforated Supply Diffuser)										
Neck Size (Dia)		Neck Velocity								
		300	400	500	600	700	800	900	1000	1100
6" An .20	cfm	60	80	100	120	140	160	180	200	220
	Ps	0.004	0.004	0.008	0.012	0.016	0.024	0.024	0.032	0.040
	Throw	1.0	2.0	3.0	3.0	4.0	6.0	7.0	8.0	9.0
8" An .35	cfm	105	140	175	210	245	280	315	350	385
	Ps	0.004	0.008	0.012	0.016	0.020	0.024	0.028	0.036	0.044
	Throw	3.0	4.0	5.0	6.0	7.0	9.0	10.0	11.0	13.0
10" An .54	cfm	160	220	270	325	380	430	490	540	595
	Ps	0.008	0.012	0.016	0.020	0.028	0.036	0.048	0.060	0.068
	Throw	3.0	5.0	6.0	7.0	9.0	10.0	12.0	13.0	15.0
12" An .78	cfm	235	310	390	470	550	625	700	780	860
	Ps	0.008	0.012	0.020	0.024	0.032	0.044	0.056	0.064	0.076
	Throw	4.0	5.0	7.0	8.0	10.0	11.0	13.0	15.0	17.0

Terminal velocity of 75 fpm