



MODEL: MCCDS CURTAIN CEILING RADIATION DAMPER SQUARE AND RECTANGULAR



UL CLASSIFIED
(SEE COMPLETE
MARKING ON PRODUCT)



MODEL MCCDS: UL 555C Listed for 3-4 hours. (ULC - S112.2)

Square or rectangular damper with quilted ceramic thermal blanket, (non-asbestos).

STANDARD CONSTRUCTION:


- Frame: Roll formed, 22 Ga. galvanized steel.
- Blades: Roll formed, 24 Ga. galvanized steel.
- Thermal Blanket: Non-asbestos, ceramic blanket.
- Springs: Stainless steel.
- Finish: Mill galvanized.

OPTIONS:

- Fusible Link: Replaceable 165°F, 212°F.
- Thermal Blanket: TB5000 24" x 24" x 1/8", non-asbestos, ceramic blanket.
- Thermal Skirt: Ceramic fiber, non-asbestos damper with skirt.

SIZE LIMITATIONS:

Only available in one size: 23.75W x 23.75H

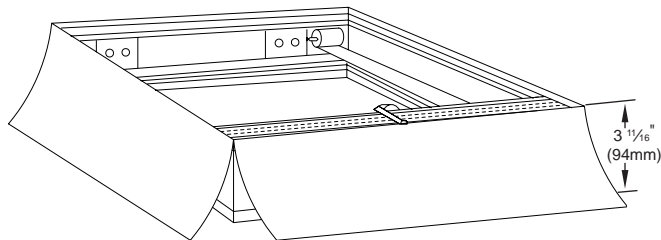

SUGGESTED SPECIFICATION

Square and rectangular skirted curtain ceiling damper shall be Model MCCDS by Metal-Fab. Ceiling dampers shall bear the Underwriters' Laboratories' label and be rated for non-ducted (MCCDS) air systems. Ceiling damper blanket shall be of the non-asbestos, curtain type for maximum free area. Ceiling damper shall be furnished with a fusible link.

Project:	Contractor:
Location:	Address:
Architect:	P.O. Number:
Engineer:	Date: