


# MFLCRFGI LIGHT COMMERCIAL INSULATED RETURN FILTER GRILLE

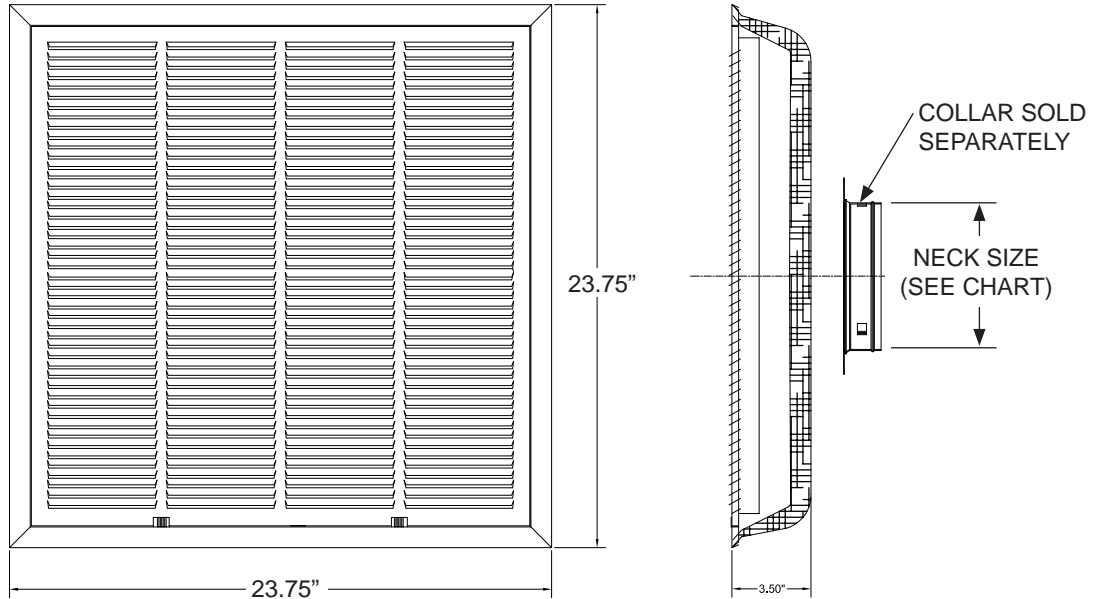

- Fits in Standard 24" x 24" T-bar Lay-in Ceiling Systems
- Steel Construction
- Molded Fiberglass Back Panel
- Uses 1" Nominal Disposable Filters
- Concealed Hinges
- Equipped with Filter Retainers
- Diffuser requires a collar ring (sold separately); Metal-Fab collar ring model MFLCCR Series, or tab-lock, and spin-in type collars are acceptable
- Face Finish: White

**MFLCRFGI (LC Insulated Return Filter Grille)**

Neck Velocity		300	400	500	600	700
<b>24x24</b>	cfm	543	724	905	1086	1267
Ak=2.23	Ps	0.016	0.032	0.052	0.072	0.096

Ps (In. H<sub>2</sub>O), Return filter grilles tested without filters.