




MFLCISDP4 LIGHT COMMERCIAL INDUSTRIAL 4-WAY SUPPLY DIFFUSER PERFORATED

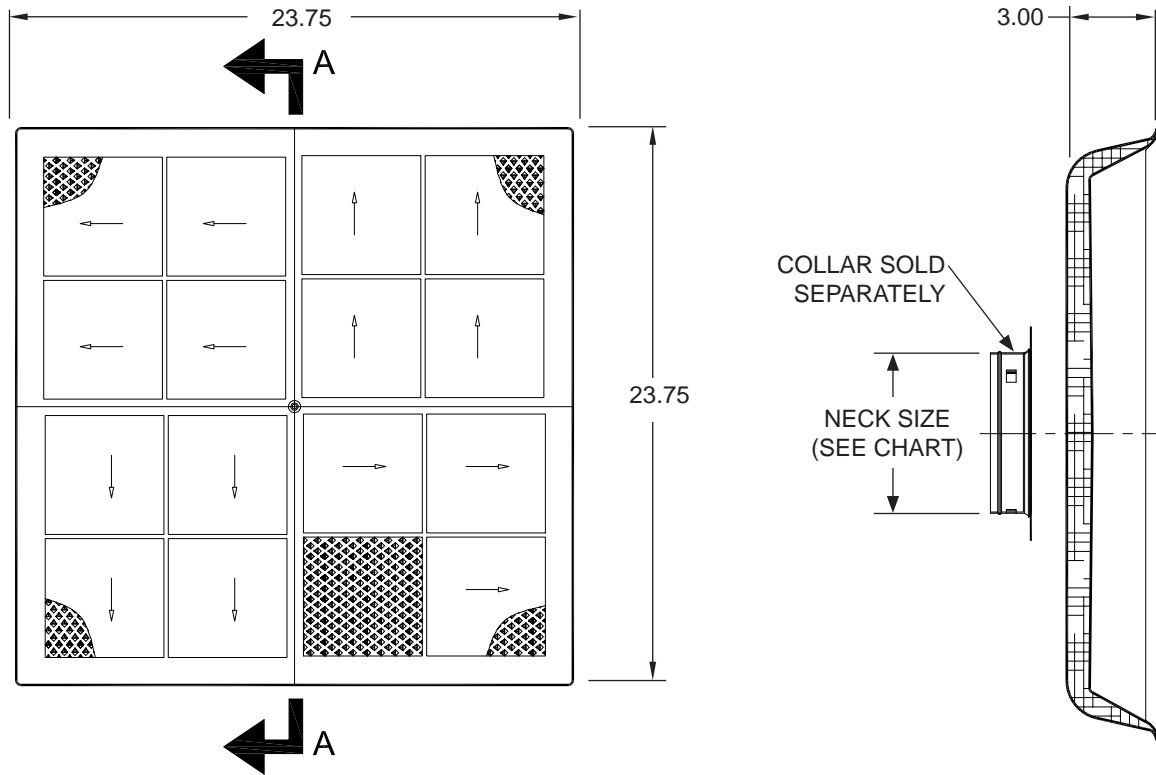

- Fits in standard 24"x 24" T-bar lay-in ceiling systems
- Perforated steel face construction with 4-way deflector
- Molded fiberglass back panel
- Diffuser requires a collar ring (sold separately); Metal-Fab collar ring model MFLCCR Series, or tab-lock, and spin-in type collars are acceptable
- Face Finish: White

MFLCISDP4 (Perforated 4-Way Supply Diffuser)										
Neck Size (Dia)		Neck Velocity								
		300	400	500	600	700	800	900	1000	1100
6"	cfm	60	80	100	120	140	160	180	200	220
	Ps	0.004	0.008	0.012	0.016	0.024	0.032	0.040	0.048	0.056
	Ak .87	Throw	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0
8"	cfm	105	140	175	210	245	280	315	350	385
	Ps	0.008	0.016	0.024	0.032	0.044	0.060	0.076	0.096	0.128
	Ak 1.11	Throw	5.0	7.0	9.0	11.0	12.0	14.0	16.0	17.0
10"	cfm	160	215	270	325	380	430	485	540	595
	Ps	0.012	0.020	0.032	0.052	0.068	0.088	0.116	0.140	0.200
	Ak 1.39	Throw	8.0	11.0	13.0	16.0	20.0	22.0	25.0	28.0
12"	cfm	240	320	400	480	560	640	720	800	880
	Ps	0.016	0.028	0.044	0.068	0.092	0.120	0.152	0.188	0.264
	Ak 1.80	Throw	12.0	16.0	21.0	25.0	30.0	34.0	39.0	44.0

Terminal velocity of 75 fpm