




# LPRM PERFORATED RETURN WITH METAL BACKING

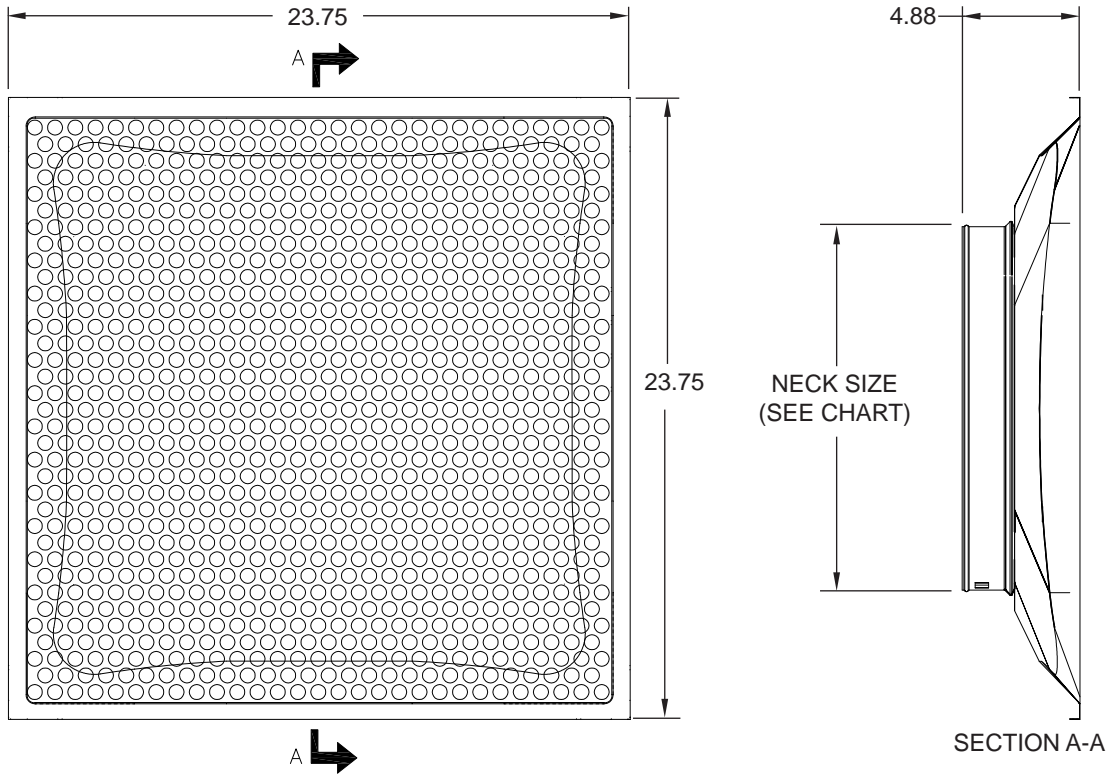

- Perforated Steel Face Construction
- Formed Steel Back Plenum Uninsulated
- Fixed 2" High Collar for Easy Connectability
- Optional Butterfly Damper (MFLCBD Series)
- White Finish

LPRM (Perforated Return w/ Metal Backing)								
Neck Size (Dia)		Neck Velocity (FPM)						
		200	300	400	500	600	700	800
-PS		0.010	0.020	0.030	0.050	0.070	0.100	0.120
6"	cfm	40	60	80	100	120	140	160
Ak 0.20								
8"	cfm	70	105	140	175	210	245	280
Ak 0.35								
10"	cfm	115	175	230	290	350	405	465
Ak 0.58								
12"	cfm	160	245	325	405	485	565	650
Ak 0.81								
14"	cfm	230	345	460	575	690	805	920
Ak 1.15								