



B-VENT PRODUCT UPDATE

Metal-Fab B-Vent connects easily to other brands.
You don't need anything else!

Mating two different brands of B-Vent doesn't have to cost you time and money - Metal-Fab B-Vent connects to competitive brands in only TWO EASY STEPS!

INSTALLING REPLACEMENT EQUIPMENT

(Into competitive female end, 3"-6"):

STEP 1: Insert Metal-Fab male end into competitive female end (inlet).
NO ADAPTER NEEDED!

STEP 2: Secure with three sheet metal screws. (See instructions in **FIG. 1**.)

DEPLETING COMPETITIVE STOCK

(Connecting into competitive male end):


STEP 1: Insert male end (outlet) of competitive gas vent into female end of Metal-Fab B-Vent adapter (M6A, M12A, M18A).

STEP 2: Tighten adapter clamp tight around gas vent. (See instructions in **FIG. 2**.)

FIG. 1



FIG. 2

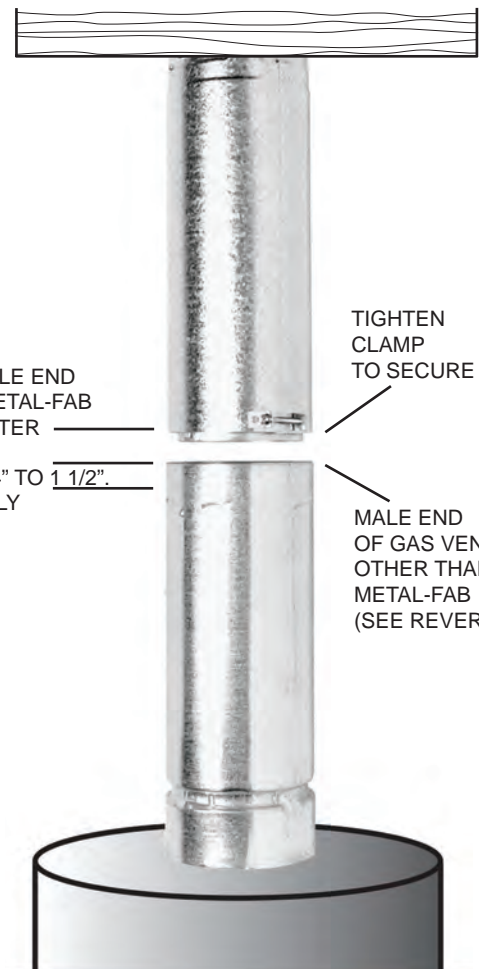

AFTER INSTALLATION SECURE WITH (3) 1/4" LONG (MAX.) SHEET METAL SCREWS AT APPROX. 120°. DO NOT PENETRATE FLUE CASING.

FEMALE END OF GAS VENT OTHER THAN METAL-FAB (SEE REVERSE)

INSERT 3/4" TO 1 1/2"

STANDARD METAL-FAB B-VENT

FEMALE END OF METAL-FAB ADAPTER

TIGHTEN CLAMP TO SECURE

INSERT 3/4" TO 1 1/2" UNTIL FULLY SEATED

MALE END OF GAS VENT OTHER THAN METAL-FAB (SEE REVERSE)

Metal-Fab round B-Vent has been evaluated and listed to Underwriter's Laboratories, Inc. to mate with other specifically identified and UL Listed round gas vent, in 3" through 6" diameters. Metal-Fab's approval covers connections to the following B-Vent products:

Continental Industries	(Airjet)
American Metal Products Co.	(Amerivent)
Hart & Cooley	(Metlvent)
Metalbest & Airmate	(Household Manufacturing)
Mitchell Metal Products Inc.	(Mitchvent)
M&G Duravent	(Duravent)
ECCO Heating Products	(ECCO Manufacturing)



P.O. Box 1138 • WICHITA, KANSAS 67201
(316) 943-2351 • FAX (316) 943-2717
info@mtlfab.com • www.mtlfab.com