




L2CXI 2 CONE LIGHT COMMERCIAL INSULATED CEILING DIFFUSER

(COLLAR SOLD SEPARATELY)

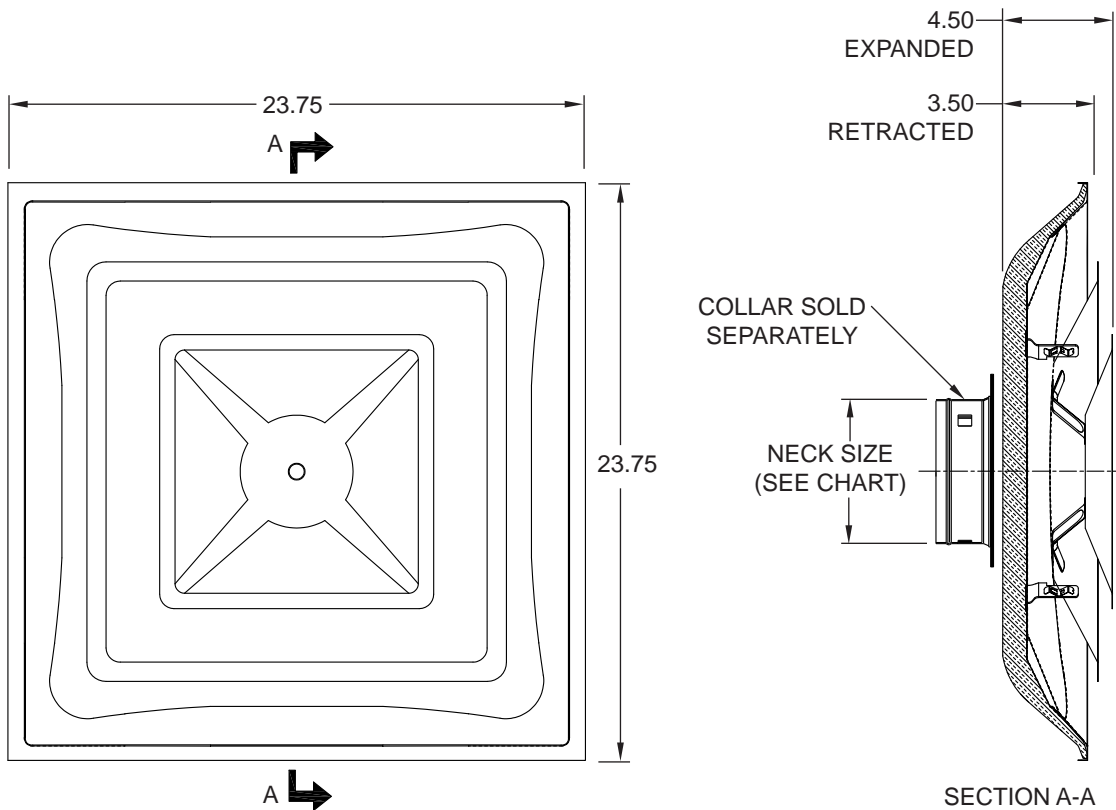

- Heavy Gauge Steel Construction
- High Air Volume 2 Cone Design
- 360 deg. Uniform Air Diffusion
- Unique Retractable Cone Design for Flush Applications
- Diffuser requires a collar ring (sold separately); Metal-Fab collar ring model MFLCCR Series, or tab-lock, and spin-in type collars are acceptable
- Optional Butterfly Damper (MFLCBD Series)
- Damper Adjustable Through Face
- Insulated Back
- White Finish

L2CXI (Cones Fully Extended)

Neck Size (Dia)		Neck Velocity									
		400	500	600	700	800	900	1000	1200	1400	1600
6"	cfm	80	100	120	140	160	180	200	240	280	320
An .20	Ps	0.008	0.016	0.024	0.032	0.048	0.060	0.076	0.116	0.156	0.208
Ak .80	Throw	4.0	4.0	5.0	6.0	7.0	9.0	11.0	13.0	15.0	17.0
8"	cfm	140	175	210	245	280	315	350	420	490	560
An .35	Ps	0.016	0.024	0.036	0.048	0.072	0.092	0.108	0.160	0.208	0.312
Ak .92	Throw	5.0	6.0	8.0	9.0	10.0	12.0	13.0	16.0	19.0	21.0
10"	cfm	220	270	325	380	435	490	540	650	760	865
An .54	Ps	0.028	0.044	0.060	0.076	0.104	0.136	0.168	0.224	0.284	0.460
Ak 1.20	Throw	6.0	8.0	9.0	11.0	13.0	15.0	17.0	21.0	25.0	27.0
12"	cfm	315	390	470	550	625	705	780	940	1095	1250
An .79	Ps	0.040	0.060	0.088	0.112	0.136	0.176	0.212	0.308	0.416	0.528
Ak 1.65	Throw	7.0	8.0	11.0	13.0	15.0	16.0	18.0	22.0	26.0	30.0

Terminal velocity of 75 fpm

L2CXI (Cones Fully Retracted)

Neck Size (Dia)		Neck Velocity									
		400	500	600	700	800	900	1000	1200	1400	1600
6"	cfm	80	100	120	140	160	180	200	240	280	320
An .20	Ps	0.024	0.040	0.056	0.072	0.100	0.116	0.144	0.204	0.284	0.360
Ak .76	Throw	3.0	4.0	5.0	6.0	6.0	8.0	10.0	12.0	13.0	15.0
8"	cfm	140	175	210	245	280	315	350	420	490	560
An .35	Ps	0.028	0.044	0.064	0.088	0.120	0.152	0.188	0.272	0.384	0.480
Ak .88	Throw	5.0	6.0	7.0	8.0	9.0	10.0	12.0	14.0	16.0	18.0
10"	cfm	220	270	325	380	435	490	540	650	760	865
An .54	Ps	0.044	0.068	0.096	0.128	0.156	0.200	0.256	0.368	0.500	0.640
Ak 1.16	Throw	6.0	7.0	9.0	10.0	12.0	13.0	15.0	17.0	20.0	23.0
12"	cfm	315	390	470	550	625	705	780	940	1095	1250
An .79	Ps	0.056	0.084	0.124	0.168	0.220	0.268	0.332	0.476	0.648	0.808
Ak 1.61	Throw	6.0	9.0	11.0	12.0	14.0	15.0	17.0	20.0	22.0	25.0

Terminal velocity of 75 fpm



P.O. Box 1138 • WICHITA, KANSAS 67201
 PHONE: 316-943-2351 • 800-835-2830
 FAX (316) 943-2717
 info@metal-fabinc.com
 www.metal-fabinc.com